
SPECTRAL EFFICIENCY CURVE

Reference 520 21	
Grating Type	Plane Holographic Grating
Groove Density (gr/mm)	1800
Spectral Range (nm)	150-450
Blaze Wavelength (nm)	
Blaze Angle (deg)	
Configuration	Quasi-littrow

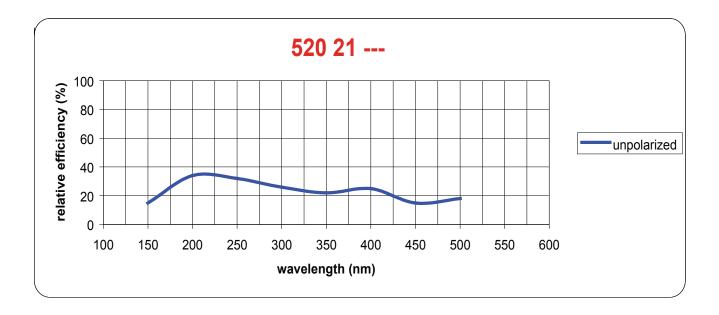

This efficiency curve should be used as reference only and does not imply any guarantee on actual performance. Actual performance of the grating will depend on several variables including the usage geometry and the coating. Efficiency curves labeled as "Theoretical" are calculated estimates of performance based on groove profile.

HORIBAJOBIN YVON

Find us at www.jobinyvon.com or telephone:

USA: +1-732-494-8660 Germany: +49 (0) 89 46 23 17- 0 China: +86 (0)10 6849 2216

France: +33 (0) 1 64 54 13 00 UK: +44 (0) 20 8204 8142 Other Countries: +33 (0) 1 64 54 13 00 Japan: +81 (0) 3 3861 8231 Italy: +39 0 2 57603050